

# INFORMATION

## Quartz Clock Timer 12 & 24 Volt Models

### OPERATING INSTRUCTIONS:

(1) To set actual time:


- Push in push-pull switch and turn the white pointer to the proper daytime.
- When the switch is being pushed, the illumination light will come on.

(2) Programming the timer for heater operation:

- Rotate the outer ring until the orange pointer is pointing to the desired start-up time.
- Pull out the push-pull switch. The green indicator light will start flashing, indicating that the timer is programmed.
- The heater will automatically start at the pre-selected time. After three hours of operation, the heater will automatically shut off.
- The heater timer will only repeat the function if the push-pull switch is reset and the green indicator lamp is flashing.

(3) Programming the timer for heater operation:

- To switch off your Webasto heater, simply push in the push-pull switch.

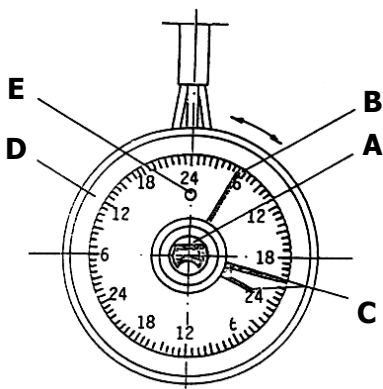

- (A) Push-Pull Switch
- (B) White Pointer (Actual Time)
- (C) Orange Pointer (Program Time)
- (D) Outer Ring
- (E) Indicator Light (Green)

#### North American Headquarters

15083 North Road • Fenton, MI 48430  
(800) 555-4518 • (800) HEATER-1

#### Canadian Operations

(800) 667-8900

**Webasto**

*Feel the drive*